


## • Portable X-ray Systems

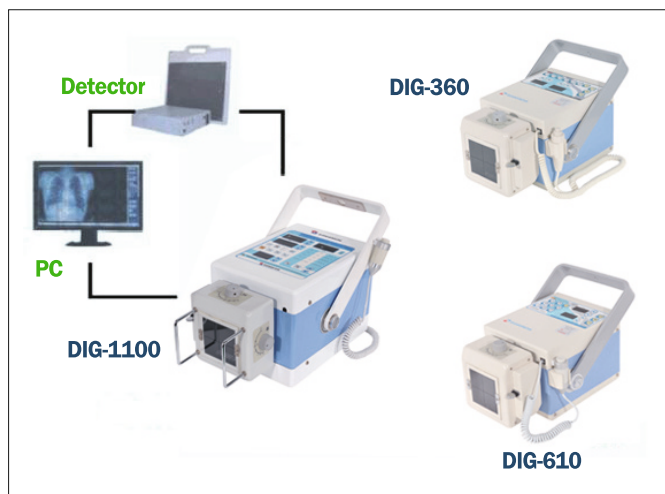

### • Description

Dongmun's another innovation; Portable X-ray Unit is Digital Technology High Frequency Inverter Type to provide the high efficiency in X-ray equipments, designed for uses in large hospitals, clinics, private practices, dental clinics bed-side diagnosis and emergencies, veterinary.

### • Features

- Compact and light weight design.
- Digital LED display, reversible.
- 6 selection presetting anatomical memory mode.
- Line voltage compensation.
- Remote control hand switch, for exposure.
- Halogen lamp collimator.
- Scale tape for SID measurement & laser pointer.

### • Specifications

Model	DIG-360	DIG-610	DIG-1100
Generator	High Frequency, inverter	High Frequency, inverter	High Frequency, inverter, Capacitor bank
Maximum Output	35mA/100kV	60mA/100kV	100mA/110kV
Power Rating	2.4kW	3.2kW	5.0kW
Frequency	70kHz	50kHz	50kHz
kVp selection	40kV-100kV, by 1kV step	40kV-100kV, by 1kV step	40kV-110kV, by 1kV step
mA selection	-	-	20-100mA, Variable
mAs selection	0.4mAs-100mAs, 25 steps	0.4mAs-100mAs, 25 steps	0.1mAs-100mAs, 38 steps
X-ray tube	Focal spot : 1.2 mm	Focal spot : 2.0 mm	Focal spot : 1.5 mm
Anatomical program	Memories for 6 selection	Memories for 6 selection	Memories for 750 selection
Display	7-segment LED read-out	7-segment LED read-out	LED read-out : kV, mA, mAs/sec,
Collimator	Auto timer, DC24V, 100W	Auto timer, DC24V, 100W	Auto timer, DC24V, 100W
	Halogen lamp. 30sec	Halogen lamp. 30sec	Halogen lamp. 30sec
	Light Field Min, 5X5cm@1m SID - Max, 35X35cm@65cm SID	Light Field Min, 5X5cm@1m SID - Max, 35X35cm@65cm SID	Light Field Min, 5X5cm@1m SID - Max, 35X35cm@65cm SID
	SID scale length : 2m Laser pointer 110/220V AC	SID scale length : 2m Laser pointer 110/220V AC	SID scale length : 2m Laser pointer 110/220V AC
Line Nominal/Phase	110V or 220V AC, 50/60Hz, single phase	110V or 220V AC, 50/60Hz, single phase	110V or 220V AC, 50/60Hz, single phase
Line Voltage Compensation	±10%	±10%	±10%
Accessories	Hand Switch, Power cable, Carrying case, Shoulder band	Hand Switch, Power cable, Carrying case, Shoulder band	Hand Switch, Power cable, Carrying case, Shoulder band
Dimensions	350L X 250W X 206H mm	350L X 250W X 206H mm	430L X 240.5W X 219H mm
Weight (Net)	Net weight : 12.5kg	Net weight : 13kg	Net weight : 19.6kg
Option	Mobile stand, Portable detector assembly 10X12", 14X17"		



Работайте с лучшими,  
всё остальное компромисс!

---

**8 (800) 775-10-98**

**medliga.ru**